




Setting Up Your Top Coil System


By Heat & Hot Water Cylinder




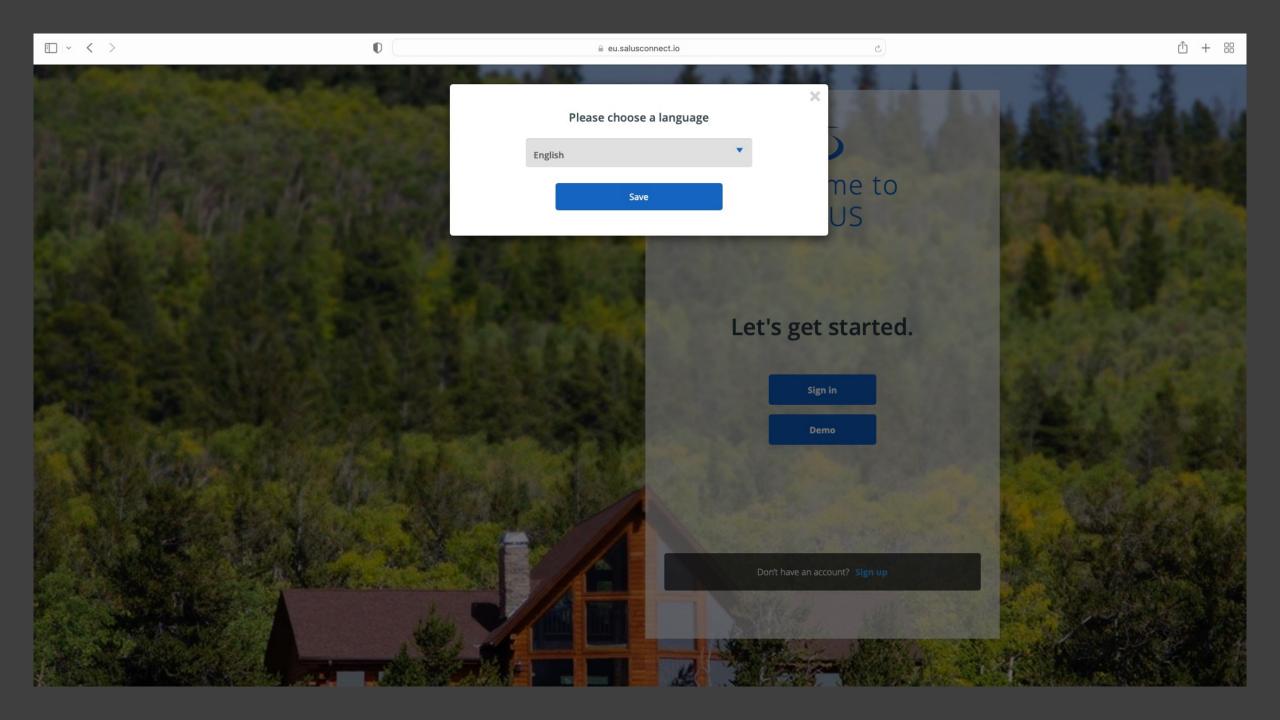

1 Create your profile

First Name HHWCYL	Last Name CYLINDERS
Email Address Example@me.com	Confirm Email Address Example@me.com
Password	Confirm Password
asswords must be between 8 and 14 characters long and must include one numeric character (0 - 9) or symbol, one lowercase (a - z), and one uppercase (A - Z).	
Country	
Mobile Number +44 7500555666	
I accept SALUS Controls Terms & Conditions	
I have read and understood SALUS Controls Privacy Notice	
I wish to receive information by email on SALUS' products, promotions, or services to enhance the use of my connected devices and apps.	
Create my profile	Cancel

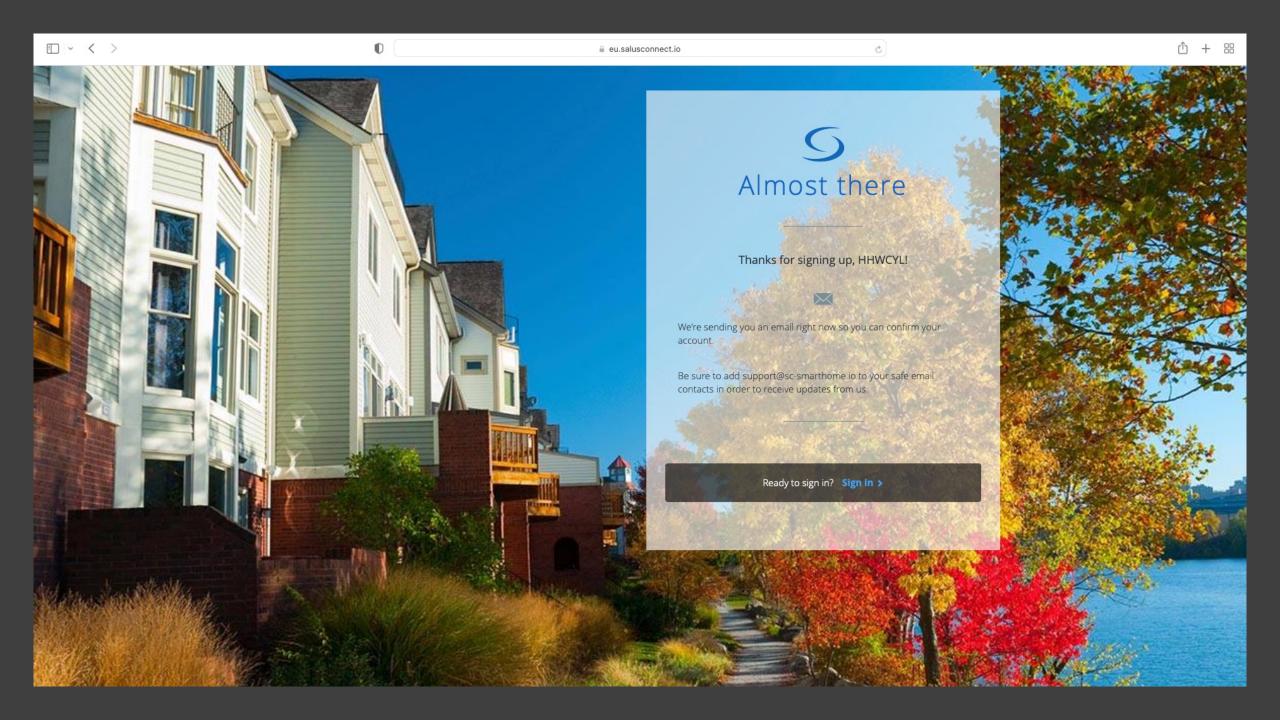


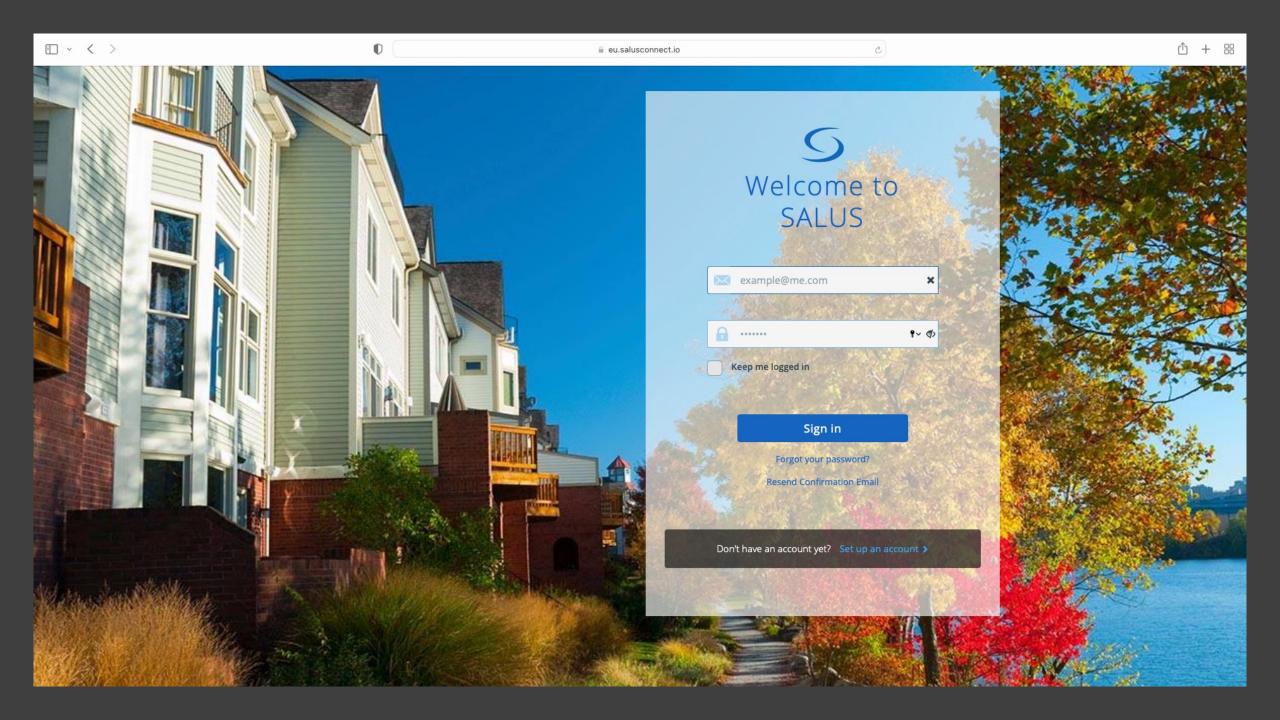



Activate your gateway

Success! Your profile is created. Now, let's activate your gateway.







Activate your gateway to begin using your devices.

Make sure your gateway is connected to the modem with an ethernet cable. When your gateway LED light is solid blue, click Activate Gateway below.

Activate gateway



Connect your equipment to the gateway now.

Connect equipment



Welcome to SALUS!

As a first-time user, please complete a few simple steps to manage your account and equipment.

Let's get started setting up your new system.

- 2 Activate your gateway
 - 1. Press the button on the top of the gateway once so that it flashes green.
 - 2. When the gateway flashes green, click Search for Gateway. Your device serial number should automatically populate in the serial field.

 NOTE: Gateway setup times out after two (2) minutes. Within that time all gateway settings should be filled and confirmed by Activate button.

Gateway serial number

Search for gateway



Welcome to SALUS!

As a first-time user, please complete a few simple steps to manage your account and equipment.

Let's get started setting up your new system.

2 Activate your gateway

Hour Format

LED Mode

- 1. Press the button on the top of the gateway once so that it flashes green.
- 2. When the gateway flashes green, click Search for Gateway. Your device serial number should automatically populate in the serial field.

NOTE: Gateway setup times out after two (2) minutes. Within that time all gateway settings should be filled and confirmed by Activate button.


Gateway serial number AC000W000610702

Search for gateway

Please enter the location address where this gateway is installed. Then, click "Activate my gateway". NOTE: You have two (2) minutes to enter this information and press "Activate my gateway" before the gateway times out.

Country


TimeZone

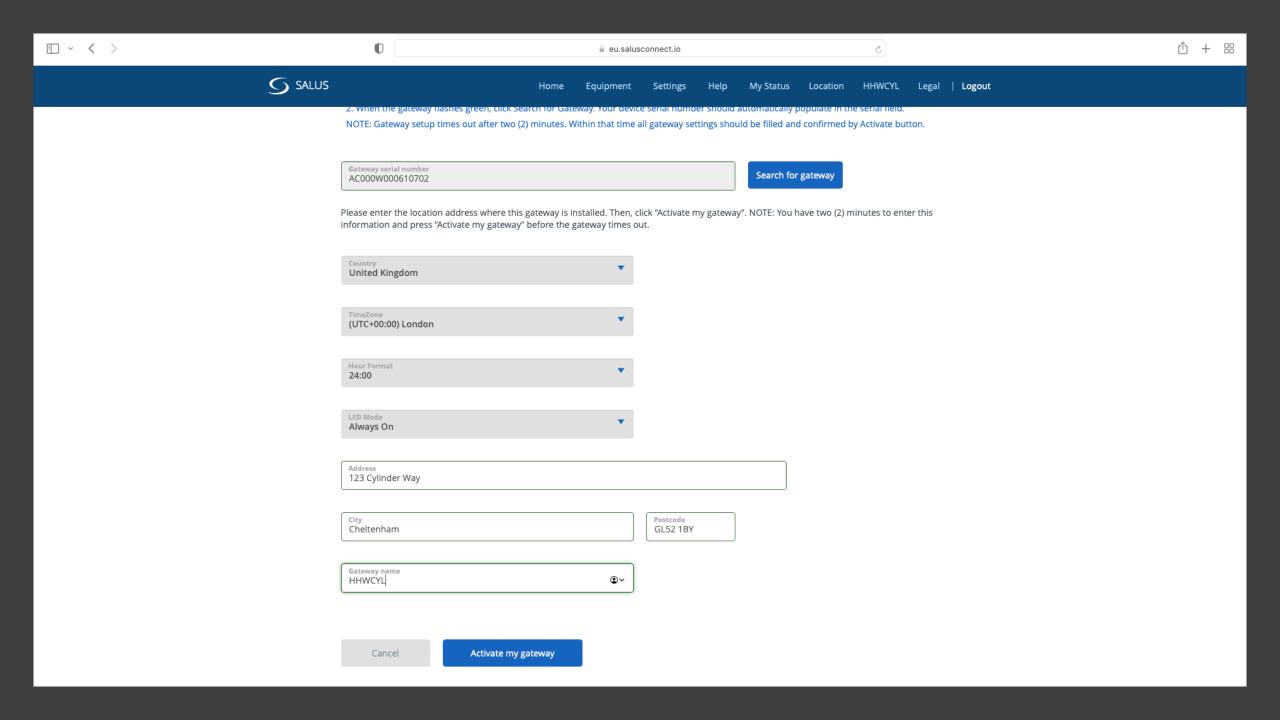



Connect equipment to the gateway

Success! Your Profile is created and your gateway is activated. Let's link devices and connect your equipment to the gateway now.







Your gateway is now activated and ready to connect to your equipment.



Connect your equipment to the gateway now.

Connect equipment

